

The **UH** series provides up to 800W/67A outputs with industry standard half brick package. The efficient SR stage is combined with patented “Buck Reset” topology that would reduce power loss to achieve 219W/in<sup>3</sup> power density. The multi-layer single side circuit board design plus the patented Sink-Plate technology would enhance the thermal performance and improve its reliability. Modules are designed for Telecom, Servers, Networking equipments and other applications that use a 48V input bus.


### PART NUMBER SYSTEM

UH	48	480	a	b	c	d	-	N	17	XX	X
Series Name	Input Voltage	Output Voltage	Enable Logic	Pin Dimension	Standoff Height	Base-Plate		Current Share	Output Current	Suffix	Version
UH	48=36V~75V 24=18V~36V	Unit: 0.1V Increments 480=48V 120=12V	P: Positive N: Negative	0 : 0.12" 1 : 0.16" 2 : 0.20" 3 : 0.24"	0 : 0.02" 1 : 0.08" 2 : 0.16"	M: 1.0mm Metal Plate A: 3.0mm Sink-Plate B: 5.0mm Sink-Plate		N : without Current share S : secondary Current share	00~C0 : for output current rating	For marketing purpose only	

### MODEL LIST (Contact to factory for special input / output)

Part Number *	Maximum Input		Maximum Output		Efficiency
UH48480abcd-N17XX0	36V~75V	887W	48V/17A	816W	92%
UH48280abcd-N29XX0	36V~75V	883W	28V/29A	812W	92%
UH48120abcd-N67XX0	36V~75V	874W	12V/67A	804W	92%

### REFERENCED THERMAL IMAGES

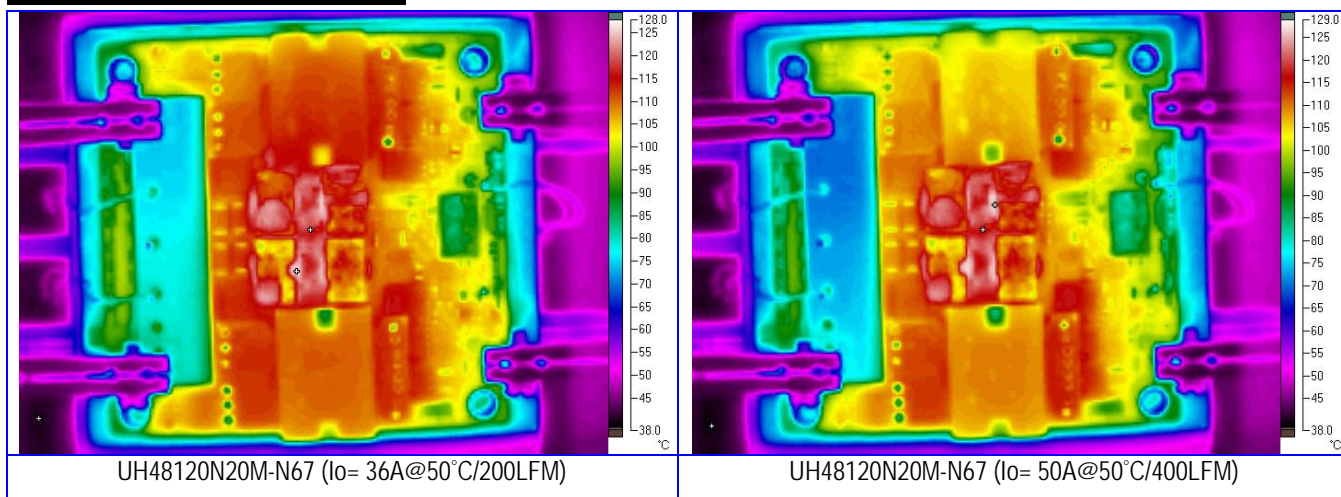

**SPECIFICATIONS****Absolute Maximum Ratings**

Temperature	Operation Storage	-40°C to +110°C -55°C to +125°C
Input Voltage Range	Operation: 48V Models  Transient (100mS): 48V Models	-0.5V to +80Vdc  100V Maximum
Isolation Voltage	Input to Output Input to Case Output to Case	2.0KV Minimum 1.0KV Minimum 1.0KV Minimum
Remote Control		-0.5V to +12Vdc

**General Parameters**

Conversion Efficiency	Typical	See table
Switching Frequency	Typical	330KHz
MTBF	Bellcore TR-332 issue 6	$2.51 \times 10^6$ hrs @GB/25°C (UH48280abcd-N29XXX)
OTP	Internal	110°C(Tc) $\pm 5^\circ\text{C}$
Weight	1.0mm Metal Plate 3.0mm Sink Plate	87g 94g

**Control Functions**

Remote Control	Logic High Logic Low	+3.0V to +6.5V 0V to +1.0V
Input Current of Remote Control Pin		-0.5mA ~ +1.5mA





**Input**

Operation Voltage Range	48V Models	+36V to +75Vdc
Reflected Ripple Current	$L_{EXT} = 20\mu\text{H}$	50mA rms/200mAp-p
Power ON Voltage Ranges	48V Models	+34.0V to +36.0Vdc
Power OFF Voltage Ranges	48V Models	+31.2V to +33.2Vdc
Off State Input Current	$V_{NOM}$	6mA Max
Latch-State Input Current	$V_{NOM}$	8mA Max
Input Capacitance	48V Models	22.0uF Max


**Output**

Voltage Accuracy	Typical	$\pm 1.0\%$
Line Regulation	Full Input Range	$\pm 0.3\%$
Load Regulation	0%~100%	$\pm 0.3\%$
Temperature Drift	-40°C ~ 100°C	$\pm 0.03\%/^\circ\text{C}$
Output Tolerance Band	All Conditions	$\pm 4\%$
Ripple & Noise (20MHz)	Peak-Peak (RMS)	3% (1%) $V_O$
Over Voltage Protection	$V_{NOM}$ , 10% Load	115~130 % $V_O$
Output Current Limits	$V_{NOM}$	108%~125%
Voltage Trim	$V_{NOM}$ , 10% Load	$\pm 10\%$
Input Ripple Rejection (<1KHz)	$V_{NOM}$ , Full Load	-50dB
Step Load (2.5A/ $\mu\text{S}$ )	50%~75% Load	$\pm 6\% V_O / 500\mu\text{S}$
Start-Up Delay Time	$V_{NOM}$ , Full Load	50mS/250mS

## TYPICAL WAVES AND CURVES

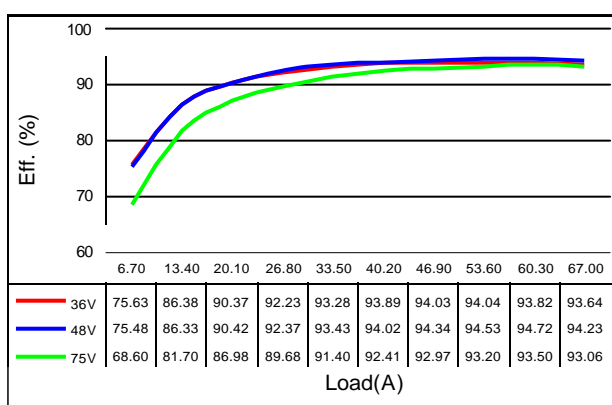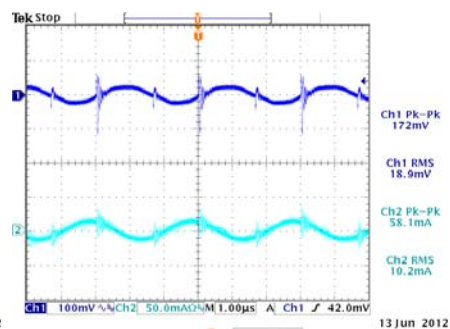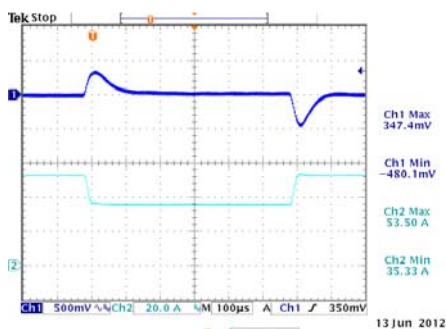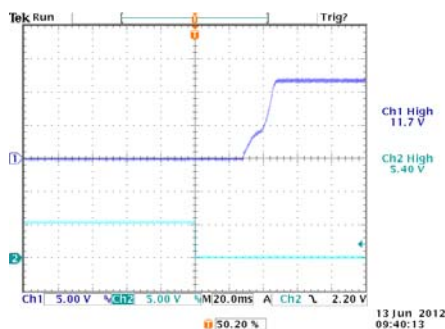


Efficiency plot of UH48120abcB-N67XXX

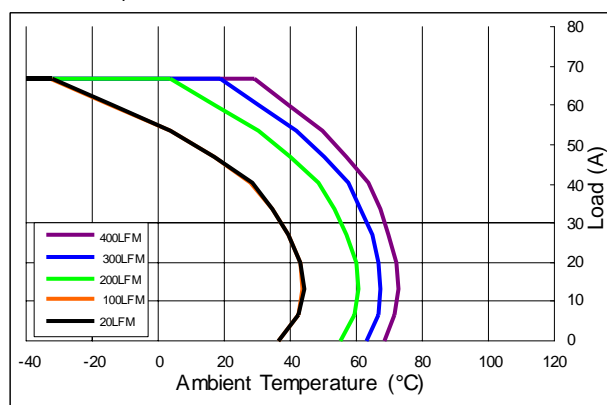

Derating curves of UH48120abcB-N67XXX for  $T_C$ = 110°C

**OPEN FRAME PACKAGE**

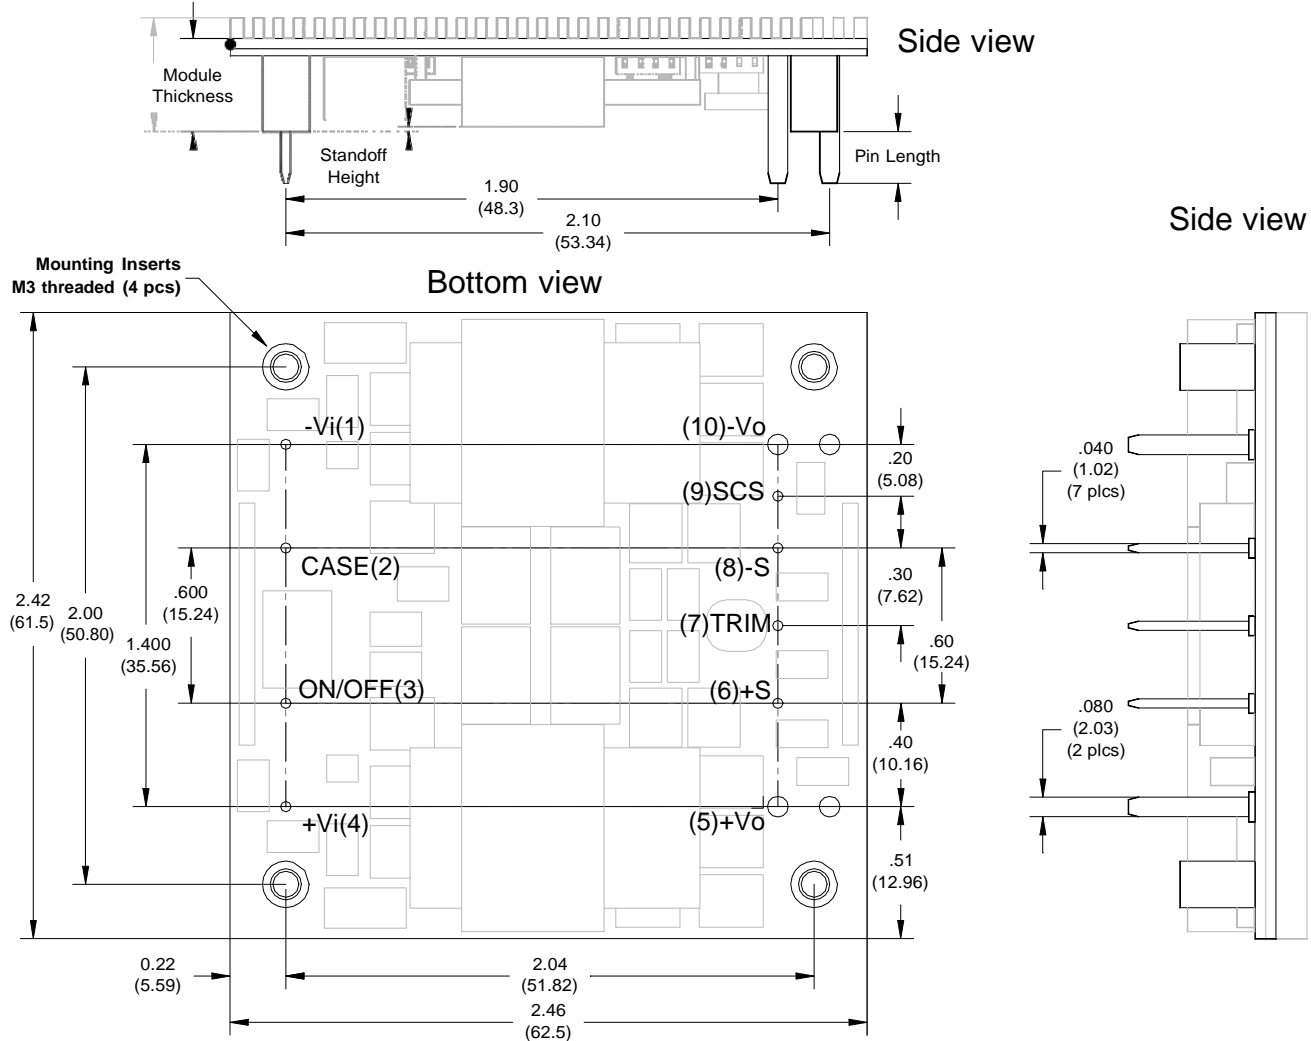

**Dimensions and Pin Connections**

Designation	Function Description	Pin #
-Vi	Negative input	1
CASE	Connected to base plate	2
ON/OFF	Remote control. To turn-on and turn-off output.	3
+Vi	Positive input	4
+Vo	Positive output	5
+S	Positive remote sense	6
TRIM	Output voltage adjust	7
-S	Negative remote sense	8
SCS	Secondary current share bus	9
-Vo	Negative output	10

**Dimensions:** inches (mm)

**Tolerances:** .xx±0.02 (.x±0.5)  
.xxx±0.01 (.x±0.25)

**Mass:** 87g / 1.0mm Metal Plate  
94g / 3.0mm Sink Plate


**Base plate:** Aluminum alloy with anode oxide

**Mounting inserts:** Stainless steel  
**Maximum torque:** 3.9 in-lb (0.44Nm)

**Pin material:** Copper alloy or Brass


**Pin plating:** Golden over Nickel

## REFERENCED EMC CIRCUIT

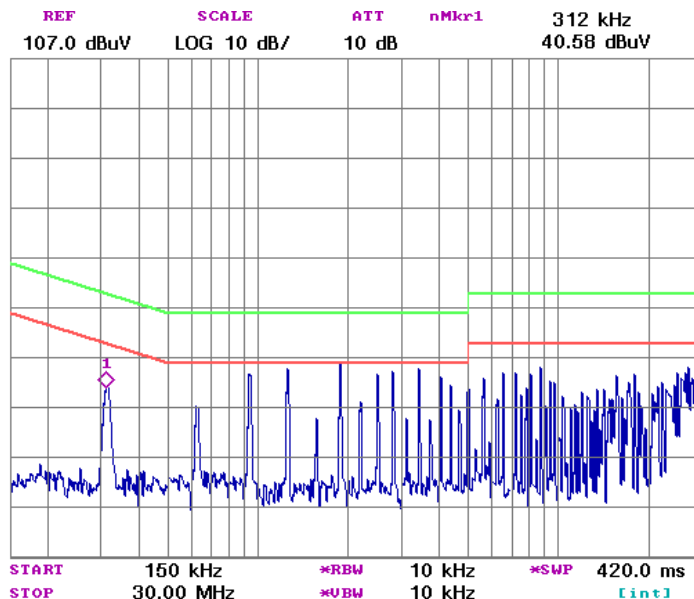

## Referenced EMC Performance

The tested result shown in left-hand side is obtained by loading the power module with a resistive load only. It can be used as a design reference for customer system. However! The performance of customer's system depends on the whole system design. It should be noted that modifications on the circuit parameters and fine adjustment of the final layout affect the final EMC performance greatly.

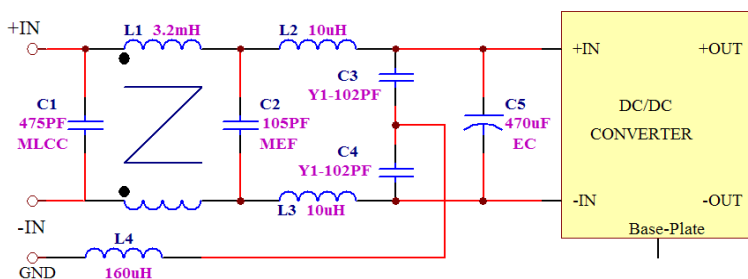

Measured conductive level of UH48120abcd-S50XXX and referenced filter circuit

## Bandwidth of EMC Components

No components are ideal for infinite frequency range. The bandwidth of EMC components should be taking into consideration when designing an EMC filter circuit. To connect ceramic capacitor with electricity capacitor in parallel and connect low inductance inductor with big one could get a better bandwidth.

## NOTE:

1. It is recommended that the input should be protected by fuses or other protection devices.
2. All specifications are typical at nominal input, full load and 25°C unless otherwise noted.
3. Specifications are subject to change without notice.
4. Printed or downloaded datasheets are not subject to Glary document control.
5. Product labels shown, including safety agency certificates, may vary based on the date of manufacture.
6. Information provided in this documentation is for ordering purposes only.
7. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications, which necessitate specific safety and regulatory standards other than the ones listed in this datasheet.

## IMPORTANT

- ※ General specifications and the performances are related to standard series only, no special customer specification display here except requested items.
- ※ In order to secure effective usage of converter and the validity of Glary's service and warranty coverage, please refer to the application notes for general usage. For needs of usage beyond the application notes, please contact to Glary headquarter or our regional sales representative office for help.