

FEATURES

- ▶ Compact SIP-8 Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1600 VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ No Min. Load Requirement
- ▶ Overload and Short Circuit Protection
- ▶ Remote On/Off Control
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval, CE Marking



UL 62368-1



PRODUCT OVERVIEW

The MINMAX MCW04 series is a range of isolated 4W DC-DC converter modules featuring fully regulated output voltages and wide 2:1 input voltage ranges. The converters come in a very small SIP-8 package which occupies only 2.0 cm² of PCB space. An excellent efficiency allows operating temperatures up to +85°C. Further features include remote ON/OFF, overload, and short circuit protection. The very compact dimensions of these DC-DC converters make them an ideal solution for many space critical applications in battery-powered equipment and instrumentation.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Power	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
					Max.	@Max. Load		
		VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	%
MCW04-12S05	12 (9 ~ 18)	5	4	800	427	30	1800	82
MCW04-12S12		12	4	333	406		1000	87
MCW04-12S15		15	3.99	266	405		820	86
MCW04-12S24		24	3.98	166	405		470	86
MCW04-12D12		±12	3.98	±166	405		560#	85
MCW04-12D15		±15	3.99	±133	405		390#	86
MCW04-24S05	24 (18 ~ 36)	5	4	800	211	15	1800	81
MCW04-24S12		12	4	333	201		1000	86
MCW04-24S15		15	3.99	266	200		820	86
MCW04-24S24		24	3.98	166	200		470	86
MCW04-24D12		±12	3.98	±166	200		560#	86
MCW04-24D15		±15	3.99	±133	200		390#	85
MCW04-48S05	48 (36 ~ 75)	5	4	800	107	10	1800	80
MCW04-48S12		12	4	333	102		1000	85
MCW04-48S15		15	3.99	266	101		820	83
MCW04-48S24		24	3.98	166	101		470	86
MCW04-48D12		±12	3.98	±166	101		560#	84
MCW04-48D15		±15	3.99	±133	101		390#	85

For each output

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	---	---	9	
	24V Input Models	---	---	18	
	48V Input Models	---	---	36	
Start-Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	10	---	ms
Input Filter	All Models			Internal Capacitor	

Remote On/Off Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	Under 0.6 VDC or Open Circuit				
Converter Off	6 to 15VDC				
Standby Input Current	Nominal Vin	---	2.5	---	mA

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	± 1.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	---	± 2.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	---	± 0.5	%
Load Regulation	Io=0% to 100%	---	---	± 1.0	%
Load Cross Regulation (Dual Output)	Asymmetrical Load 25/100% Full Load	---	---	± 5.0	%
Minimum Load	No minimum Load Requirement				
Ripple & Noise	0-20 MHz Bandwidth	---	---	80	mV _{P-P}
Transient Recovery Time	25% Load Step Change	---	250	---	μsec
Transient Response Deviation		---	± 3	± 5	%
Temperature Coefficient		---	---	± 0.02	%/°C
Over Load Protection	Foldback	---	160	---	%
Short Circuit Protection				Continuous, Automatic Recovery	

General Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1600	---	---	VDC
	1 Second	1920	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	200	---	pF
Switching Frequency	PFM Mode	100	---	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	3,389,885	---	---	Hours
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1 & 60950-1(CB report)				

EMC Specifications

Parameter	Standards & Level			Performance
EMI	Conduction	EN 55032	With external components	Class A ⁽¹⁾
	Radiation			
EN 55024, EN 55035				
EMS	ESD	Direct discharge	Indirect discharge HCP & VCP	A
		EN 61000-4-2 Air ± 8kV	Contact ± 6kV	
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient ⁽²⁾	EN 61000-4-4 ±2kV		A
	Surge ⁽²⁾	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 3A/m		A

Environmental Specifications



Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	°C
Case Temperature	---	+100	°C
Storage Temperature	-55	+125	°C
Humidity (non condensing)	---	95	% rel. H

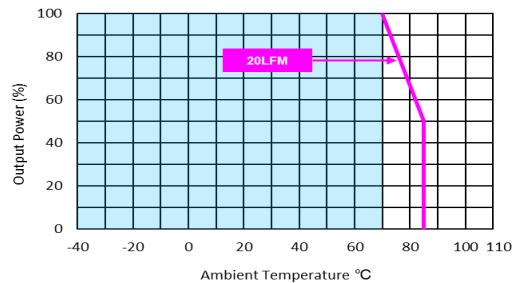Power Derating Curve

Notes

- 1 To meet EN 55032 Class A with an external filter, please contact MINMAX.
- 2 To meet EN 61000-4-4 & EN 61000-4-5 an external filter requested, please contact MINMAX.
- 3 Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact MINMAX.
- 6 Specifications are subject to change without notice.

Package Specifications

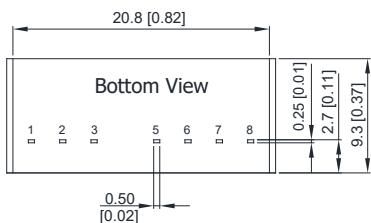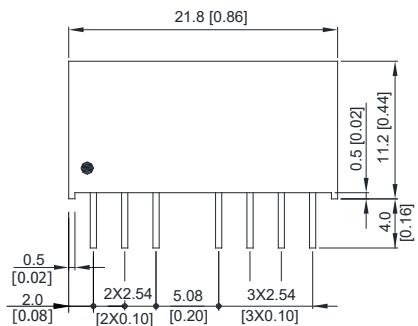Mechanical Dimensions



Pin Connections

Pin	Single Output	Dual Output
1	-Vin	-Vin
2	+Vin	+Vin
3	Remote On/Off	Remote On/Off
5	NC	NC
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins: ±0.1(±0.004)

Physical Characteristics

Case Size : 21.8x9.3x11.2 mm (0.86x0.37x0.44 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)


Pin Material : Phosphor Bronze with Tin Plate

Weight : 4.8g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} $0.47\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

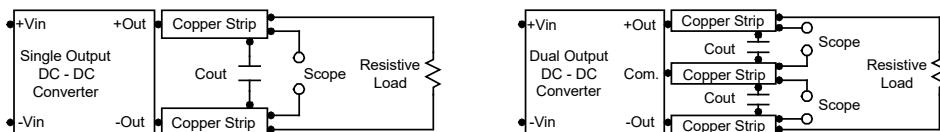

Technical Notes

Remote On/Off

Negative logic remote on/off turns the module off during a logic high voltage on the remote on/off pin, and on during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the $-Vin$ terminal. The switch can be an open collector or equivalent.

A logic high is 6V to 15V. A logic low is under 0.6 VDC or open circuit, drops down to 0VDC by $2mV/^\circ C$. The maximum sink current at on/off terminal during a logic low is 1 mA. The maximum allowable leakage current of the switch at on/off terminal= (under 0.6VDC or open circuit) is 1mA.

Maximum Capacitive Load

The MCW04 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.


Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Input Source Impedance



The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a $3.3\mu F$ for the 12V input devices and a $1.5\mu F$ for the 24V and 48V input devices.

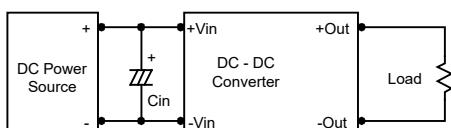

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $3.3\mu F$ capacitors at the output.

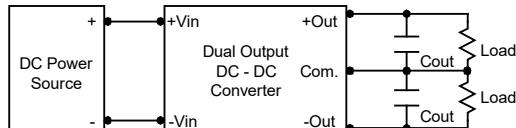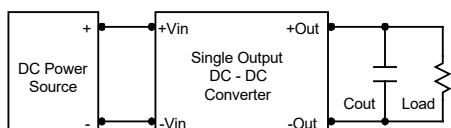

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $100^\circ C$. The derating curves are determined from measurements obtained in a test setup.

