

FEATURES

- ▶ Low Cost
- ▶ 6000VDC Isolation
- ▶ MTBF > 600,000 Hours
- ▶ Short Circuit Protection
- ▶ Input 5, 12 and 24VDC
- ▶ Output 5, 12, 15, ± 5 , ± 12 and ± 15 VDC
- ▶ Regulated Outputs
- ▶ Low Isolation Capacitance
- ▶ Low Leakage Current
- ▶ 3 Years Product Warranty



PRODUCT OVERVIEW

Minmax's MIR500 2W DC-DC's are specially designed to provide ultra-high levels of isolation 6000VDC in a low-profile DIP package.

The series consists of 18 models with input voltages of 5V, 12V and 24VDC which offers regulated output voltages of 5V, 12V, 15VDC in both single and dual output configurations.

The MIR500 series is an excellent selection for a variety of applications including mixed analog/digital subsystems, railroad/transportation equipments, medical equipment subsystems, process/machine control equipments and automatic test instrumentation.

Model Selection Guide

Model Number		Input Voltage (Range)	Output Voltage	Output Current	Input Current		Reflected Ripple Current	Max. capacitive Load	Efficiency (typ.)
					Max.	@Max. Load			
					VDC	VDC	mA	mA(typ.)	mA (typ.)
MIR501	cUL us UL 60950-1	5 (4.5 ~ 5.5)	5	400	645	100	15	680	62
MIR502			12	165	629				
MIR503			15	133	623				
MIR504			± 5	± 100	476				
MIR505			± 12	± 83	699			270#	42
MIR506			± 15	± 66	695				
MIR511		12 (10.8 ~ 13.2)	5	400	269	50	8	680	62
MIR512			12	165	262				
MIR513			15	133	260				
MIR514			± 5	± 100	185				
MIR515			± 12	± 83	281			270#	45
MIR516			± 15	± 66	280				
MIR521		24 (21.6 ~ 26.4)	5	400	134	30	3	680	62
MIR522			12	165	131				
MIR523			15	133	130				
MIR524			± 5	± 100	93			270#	45
MIR525			± 12	± 83	143				
MIR526			± 15	± 66	142				

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	7.5	
	12V Input Models	-0.7	---	15	
	24V Input Models	-0.7	---	30	
Short Circuit Input Power	All Models	---	---	2000	mW
Internal Power Dissipation		---	---	2000	mW
Conducted EMI		Compliance to EN 55022, class A			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±4.0	%Vom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±2.0	±4.0	%
Line Regulation	Vin=Min. to Max.	---	±0.3	±0.5	%
Load Regulation	Io=10% to 100%	---	±0.5	±1.0	%
Min. Load	No minimum Load Requirement				
Ripple & Noise (20MHz)		---	30	50	mV P-P
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection		Continuous			

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	6000	---	---	VDC
I/O Isolation Test Voltage	Flash tested for 1 Second	8000	---	---	VDC
Leakage Current	240VAC, 60Hz	---	---	2	µA
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	30	pF
Switching Frequency		25	---	80	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	600,000	---	---	Hours


Input Fuse

5V Input Models	12V Input Models	24V Input Models
1000mA Slow-Blow Type	500mA Slow-Blow Type	250mA Slow-Blow Type

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)		-25	+75	°C
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C


Power Derating Curve

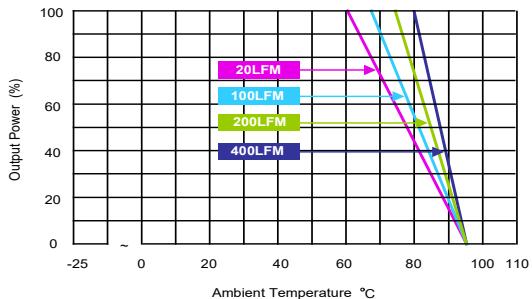

Notes

- 1 Specifications typical at $T_a=+25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Ripple & Noise measurement bandwidth is 0-20 MHz.
- 3 All DC-DC converters should be externally fused at the front end for protection.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 Specifications are subject to change without notice.

Package Specifications

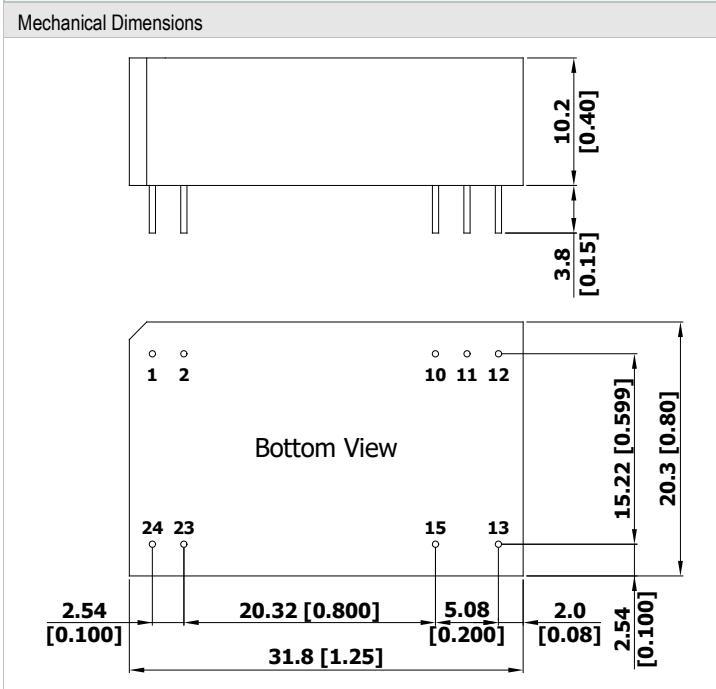

Pin Connections			
Pin	Single Output	Dual Output	Diameter mm (inches)
1	+Vin	+Vin	$\emptyset 0.5$ [0.02]
2	+Vin	+Vin	$\emptyset 0.5$ [0.02]
10	No Pin	Common	$\emptyset 0.5$ [0.02]
11	No Pin	Common	$\emptyset 0.5$ [0.02]
12	-Vout	No Pin	$\emptyset 0.5$ [0.02]
13	+Vout	-Vout	$\emptyset 0.5$ [0.02]
15	No Pin	+Vout	$\emptyset 0.5$ [0.02]
23	-Vin	-Vin	$\emptyset 0.5$ [0.02]
24	-Vin	-Vin	$\emptyset 0.5$ [0.02]

- All dimensions in mm (inches)
- Tolerance: $X.X \pm 0.25$ ($X.XX \pm 0.01$)
 $X.XX \pm 0.13$ ($X.XXX \pm 0.005$)
- Pin pitch tolerance: ± 0.25 (0.01)
- Pin diameter tolerance: $X.X \pm 0.05$ ($X.XX \pm 0.002$)

Physical Characteristics


Case Size	:	31.8x20.3x10.2mm (1.25x0.8x0.40 inches)
Case Material	:	Plastic resin (flammability to UL 94V-0 rated)
Pin Material	:	Copper-Clad Steel Wire
Weight	:	12.4g

Test Setup

Input Reflected-Ripple Current Test Setup


Input reflected-ripple current is measured with a inductor Lin (4.7 μ H) and Cin (220 μ F, ESR < 1.0 Ω at 100 kHz) to simulate source impedance.

Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

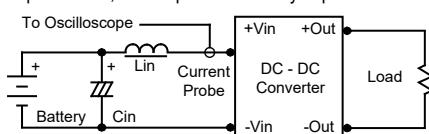

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.33 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

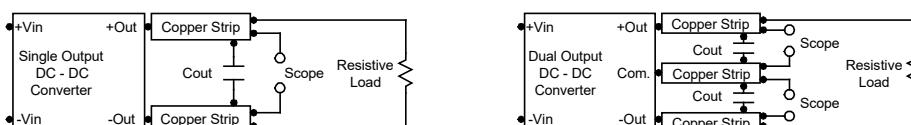


Technical Notes

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.


In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 4.7 μ F for the 5V input devices and a 2.2 μ F for the 12V and 24V devices.

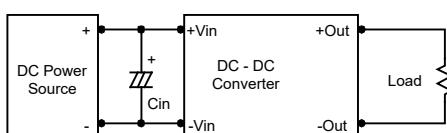

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1.5 μ F capacitors at the output.

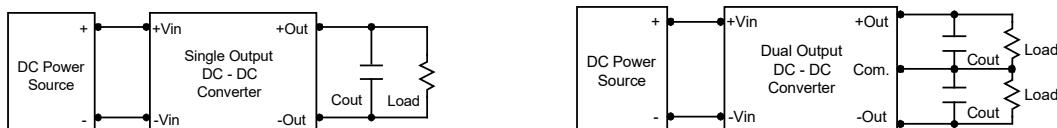

Maximum Capacitive Load

The MIR500 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 270 μ F maximum capacitive load for dual outputs and 680 μ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 95°C.

The derating curves are determined from measurements obtained in a test setup.

