

FEATURES

- ▶ Industrial SMD Package
- ▶ Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rate for 300Vrms Working Voltage
- ▶ Common Mode Transient Immunity:15KV/μs
- ▶ Qualified for IGBT and High Isolation Applications
- ▶ Operating Ambient Temp. Range -25°C to +80°C
- ▶ Water-washable Process Available(option)
- ▶ Tape & Reel Package Available
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval



CE **cUL[®]** UL 60950-1 **CB** Scheme



REACH COMPLIANT



PRODUCT OVERVIEW

The MINMAX MSDEU02-HI series is a new range of isolated 2W DC-DC converter modules in SMD package which feature a Ultra-high I/O-isolation voltage rated for 8000VDC with reinforced insulation. A very high common mode transient immunity with 15KV/μs qualifies these product for IGBT driver applications. There are 15 Models available for 5, 12, and 24VDC input. These converters offer a cost-effective solution for wind turbine, solar panel, transportation systems, industrial control equipments and some IGBT driver applications where a very high I/O-isolation is required.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Load Regulation	Max. capacitive Load	Efficiency (typ.)
			Max.	Min.	@Max. Load	@No Load			
			VDC	VDC	mA	mA	mA(typ.)	mA(typ.)	% (max.)
MSDEU02-05S05HI	5 (4.5 ~ 5.5)	5	400	8	615		90	330	65
MSDEU02-05S12HI		12	165	3	609				65
MSDEU02-05S15HI		15	133	2.5	605				66
MSDEU02-05D12HI		±12	±83	±1.5	553			100#	72
MSDEU02-05D15HI		±15	±66	±1	542				73
MSDEU02-12S05HI	12 (10.8 ~ 13.2)	5	400	8	256		40	330	65
MSDEU02-12S12HI		12	165	3	254				65
MSDEU02-12S15HI		15	133	2.5	252				66
MSDEU02-12D12HI		±12	±83	±1.5	224			100#	74
MSDEU02-12D15HI		±15	±66	±1	220				75
MSDEU02-24S05HI	24 (21.6 ~ 26.4)	5	400	8	128		30	330	65
MSDEU02-24S12HI		12	165	3	127				65
MSDEU02-24S15HI		15	133	2.5	126				66
MSDEU02-24D12HI		±12	±83	±1.5	112			100#	74
MSDEU02-24D15HI		±15	±66	±1	110				75

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Filter	All Models			Internal Capacitor	

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	± 2.0	± 4.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	± 0.1	± 1.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	± 1.2	± 1.5	%
Load Regulation	Io=20% to 100%			See Model Selection Guide	
Ripple & Noise	0-20 MHz Bandwidth	---	---	150	mV _{P-P}
Temperature Coefficient		---	± 0.01	± 0.02	%/ $^{\circ}$ C
Short Circuit Protection		0.5 Second Max., Automatic Recovery			

Isolation, Safety Standards


Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 300Vrms working voltage	4000	---	---	VACrms
	Tested for 1 second	8000	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	G Ω
I/O Isolation Capacitance	100KHz, 1V	---	15	20	pF
Common Mode Transient Immunity		15	---	---	kV/ μ s
Safety Approvals	UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-report)				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		50	80	100	KHz
MTBF (calculated)	MIL-HDBK-217F@25 $^{\circ}$ C, Ground Benign	2,000,000	---	---	Hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1		Level 2		


Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-25	+80	$^{\circ}$ C
Case Temperature		---	+90	$^{\circ}$ C
Storage Temperature Range		-50	+125	$^{\circ}$ C
Humidity (non condensing)		---	95	% rel. H
Cooling	Natural Convection			
Lead-free reflow solder process	IPC/JEDEC J-STD-020D.1			

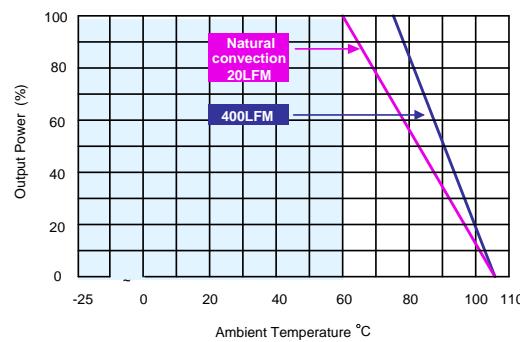Power Derating Curve


Notes

- 1 Specifications typical at $T_a=+25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 It is not recommended to use water-washing process on SMT units.
- 7 Specifications are subject to change without notice.

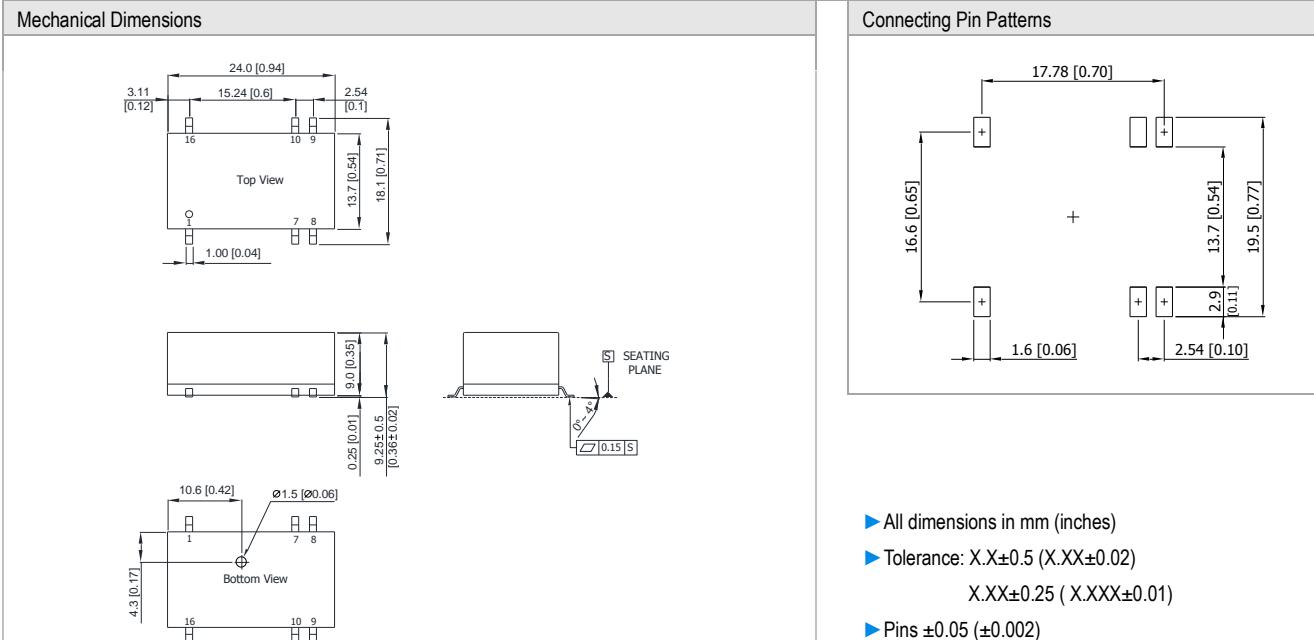Package Specifications


Pin Connections		
Pin	Single Output	Dual Output
1	-Vin	-Vin
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

NC: No Connection

Physical Characteristics	
Case Size	: 24.0x13.7x9.0mm (0.94x0.54x0.35 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Phosphor bronze
Weight	: 3.75g




Order Code Table

Standard	For water-washable process
MSDEU02-05S05HI	MSDEU02-05S05HI-W
MSDEU02-05S12HI	MSDEU02-05S12HI-W
MSDEU02-05S15HI	MSDEU02-05S15HI-W
MSDEU02-05D12HI	MSDEU02-05D12HI-W
MSDEU02-05D15HI	MSDEU02-05D15HI-W
MSDEU02-12S05HI	MSDEU02-12S05HI-W
MSDEU02-12S12HI	MSDEU02-12S12HI-W
MSDEU02-12S15HI	MSDEU02-12S15HI-W
MSDEU02-12D12HI	MSDEU02-12D12HI-W
MSDEU02-12D15HI	MSDEU02-12D15HI-W
MSDEU02-24S05HI	MSDEU02-24S05HI-W
MSDEU02-24S12HI	MSDEU02-24S12HI-W
MSDEU02-24S15HI	MSDEU02-24S15HI-W
MSDEU02-24D12HI	MSDEU02-24D12HI-W
MSDEU02-24D15HI	MSDEU02-24D15HI-W

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

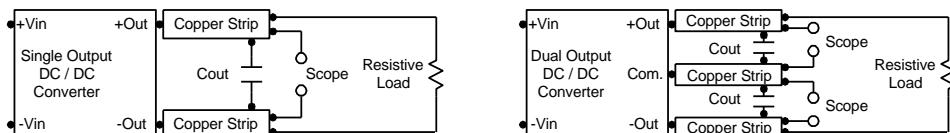

Technical Notes


Maximum Capacitive Load

The MSDEU02-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100 μ F maximum capacitive load for dual outputs and 330 μ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 2.2 μ F for the 5V input devices, a 1.0 μ F for the 12V input devices and a 0.47 μ F for the 24V input devices.

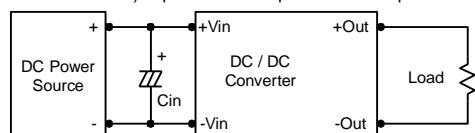

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

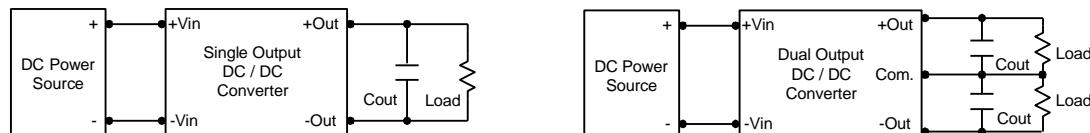

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C. The derating curves are determined from measurements obtained in a test setup.

