

FEATURES

- Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- Ultra-high I/O Isolation 5200VDC
- Operating Ambient Temp. Range -40°C to +90°C
- Short Circuit Protection
- UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval



PRODUCT OVERVIEW

The MINMAX MA01-HI series is a range of isolated 1W DC-DC converter modules in SIP-package which feature a high I/O isolation voltage rated for 5200V, using for electricity and energy applications. There are 40 Models available for 5, 12, 15 or 24VDC input. These converters offer an economical solution for all applications where a high I/O isolation is required.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current			Load Regulation	Max. capacitive Load	Efficiency (typ.)
				Max.	@Max. Load	@No Load			
				VDC	mA	mA(typ.)			
MA01-05S033HI	5 ±10%	5 VDC	3.3	303	286	286	35	20	1000
MA01-05S05HI			5	200	286	286		15	470
MA01-05S09HI			9	111	266	266		10	470
MA01-05S12HI			12	84	261	261		10	220
MA01-05S15HI			15	66	254	254		10	220
MA01-05D05HI			±5	±100	282	282		15	220#
MA01-05D09HI			±9	±56	269	269		10	220#
MA01-05D12HI			±12	±42	262	262		10	100#
MA01-05D15HI			±15	±33	254	254		10	100#
MA01-05A1509HI			15	+33				10	100
			-9	-55	260	260		10	220
MA01-12S033HI		12 ±10%	3.3	303	117	117	17	20	1000
MA01-12S05HI			5	200	117	117		15	470
MA01-12S09HI			9	111	110	110		10	470
MA01-12S12HI			12	84	108	108		10	220
MA01-12S15HI			15	66	104	104		10	220
MA01-12D05HI			±5	±100	116	116		15	220#
MA01-12D09HI			±9	±56	111	111		10	220#
MA01-12D12HI			±12	±42	108	108		10	100#
MA01-12D15HI			±15	±33	104	104		10	100#
MA01-12A1509HI			15	+33				10	100
			-9	-55	107	107		10	220
MA01-15S033HI	15 ±10%	15 VDC	3.3	303	95	95	16	20	1000
MA01-15S05HI			5	200	95	95		15	470
MA01-15S09HI			9	111	89	89		10	470
MA01-15S12HI			12	84	90	90		10	220
MA01-15S15HI			15	66	84	84		10	220
MA01-15D05HI			±5	±100	94	94		15	220#
MA01-15D09HI			±9	±56	90	90		10	220#
MA01-15D12HI			±12	±42	86	86		10	100#
MA01-15D15HI			±15	±33	84	84		10	100#
MA01-15A1509HI			15	+33				10	100
			-9	-55	87	87		10	220
MA01-24S033HI	24 ±10%	24 VDC	3.3	303	60	60	12	20	1000
MA01-24S05HI			5	200	60	60		15	470
MA01-24S09HI			9	111	56	56		10	470
MA01-24S12HI			12	84	53	53		10	220
MA01-24S15HI			15	66	52	52		10	220
MA01-24D05HI			±5	±100	59	59		15	220#
MA01-24D09HI			±9	±56	56	56		10	220#
MA01-24D12HI			±12	±42	55	55		10	100#
MA01-24D15HI			±15	±33	53	53		10	100#
MA01-24A1509HI			15	+33				10	100
			-9	-55	55	55		10	220

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	15V Input Models	-0.7	---	20	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
	15V Input Models	13.5	15	16.5	
	24V Input Models	21.6	24	26.4	
Input Filter	All Models	Internal Capacitor			

Output Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	± 5.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	± 0.1	± 1.0	%
Line Regulation	For Vin Change of 1%	---	± 1.2	---	%
Load Regulation	$I_o=20\% \text{ to } 100\%$	See Model Selection Guide (Operation at lower load will not damage the converter, but it may not meet all specifications)			
Ripple & Noise	0-20MHz Bandwidth	---	---	100	mV P-P
Temperature Coefficient		---	± 0.01	± 0.02	%/ $^{\circ}\text{C}$
Short Circuit Protection	Continuous, Automatic Recovery				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Rated for 60 seconds	5200	---	---	VDC
	Tested for 1 second	5700	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	G Ω
I/O Isolation Capacitance	100kHz, 1V	---	7	---	pF
Switching Frequency		---	100	---	kHz
MTBF (calculated)	MIL-HDBK-217F@ 25°C , Ground Benign	2,000,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition (CSA certificate), IEC/EN 60950-1(CB-report) UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)				

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	$^{\circ}\text{C}$
Case Temperature	---	+100	$^{\circ}\text{C}$
Storage Temperature Range	-55	+125	$^{\circ}\text{C}$
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	$^{\circ}\text{C}$


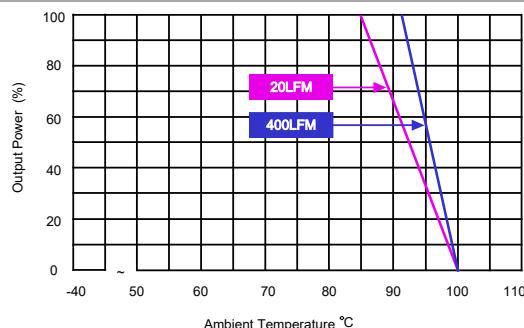
Power Derating Curve


Notes

- 1 Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 Specifications are subject to change without notice.
- 6 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications

Mechanical Dimensions

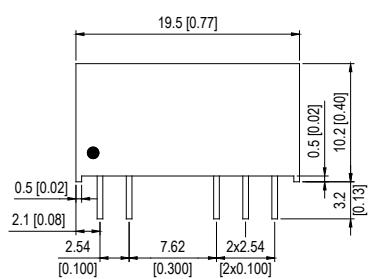

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No Pin	Common
7	+Vout	+Vout

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- Pins ±0.05(±0.002)


Physical Characteristics

Case Size	: 19.5x7.1x10.2mm (0.77x0.28x0.40 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Alloy 42
Weight	: 2.4g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} $0.33\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

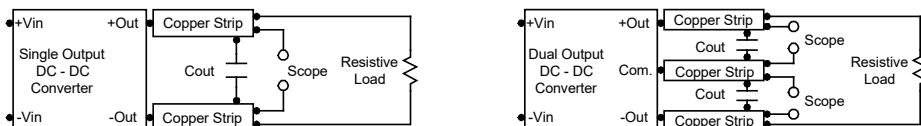

Technical Notes


Maximum Capacitive Load

The MA01-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a $2.2\mu F$ for the 5V input devices, a $1.0\mu F$ for the 12V,15V input devices and a $0.47\mu F$ for the 24V devices.

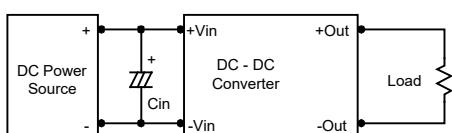

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $1.0\mu F$ capacitors at the output.

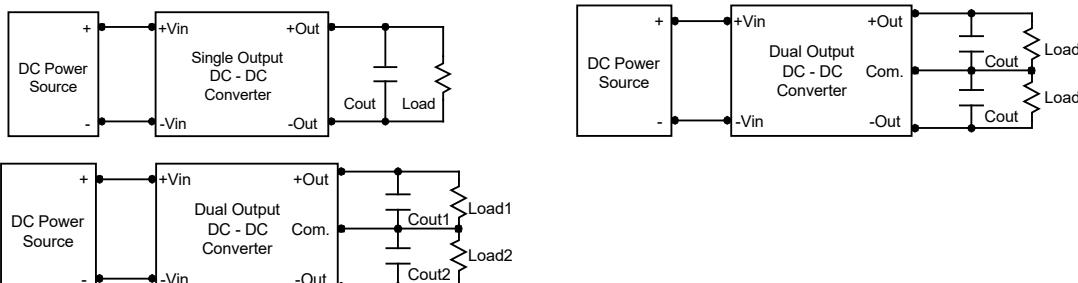

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $100^{\circ}C$. The derating curves are determined from measurements obtained in a test setup.

