

## FEATURES

- ▶ Industrial Standard SIP-7 Package
- ▶ Unregulated Output Voltage
- ▶ Ultra-high I/O Isolation 5700VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ Short Circuit Protection
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval



## PRODUCT OVERVIEW

The MINMAX MAEU02-HI series is a range of isolated 2W DC-DC converter modules in SIP-7 package which feature a high I/O isolation voltage rated for 5700VDC, using for electricity and energy applications. There are 40 models available for 5, 12, 15 and 24V input. These converters offer a cost-effective solution for wind turbine, solar panel, transportation systems, industrial control equipments where a high I/O isolation is required.

### Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Load Regulation	Max. capacitive Load	Efficiency (typ.) @Max. Load
		VDC	VDC	@Max. Load	@No Load			
MAEU02-05S03HI	5 ±10%	3.3	500	446	35	% (max.)	μF	%
MAEU02-05S05HI		5	400	500				
MAEU02-05S09HI		9	222	493				
MAEU02-05S12HI		12	168	492				
MAEU02-05S15HI		15	132	501				
MAEU02-05D05HI		±5	±200	513				
MAEU02-05D09HI		±9	±112	504				
MAEU02-05D12HI		±12	±84	504				
MAEU02-05D15HI		±15	±66	501				
MAEU02-05A1509HI		15	66	495	35	10	200	80
		-9	-110					
MAEU02-12S03HI	12 ±10%	3.3	500	181	17	% (max.)	μF	%
MAEU02-12S05HI		5	400	211				
MAEU02-12S09HI		9	222	206				
MAEU02-12S12HI		12	168	202				
MAEU02-12S15HI		15	132	201				
MAEU02-12D05HI		±5	±200	211				
MAEU02-12D09HI		±9	±112	207				
MAEU02-12D12HI		±12	±84	205				
MAEU02-12D15HI		±15	±66	199				
MAEU02-12A1509HI		15	66	204	17	10	200	81
		-9	-110					
MAEU02-15S03HI	15 ±10%	3.3	500	143	16	% (max.)	μF	%
MAEU02-15S05HI		5	400	169				
MAEU02-15S09HI		9	222	160				
MAEU02-15S12HI		12	168	162				
MAEU02-15S15HI		15	132	155				
MAEU02-15D05HI		±5	±200	165				
MAEU02-15D09HI		±9	±112	160				
MAEU02-15D12HI		±12	±84	164				
MAEU02-15D15HI		±15	±66	161				
MAEU02-15A1509HI		15	66	159	16	10	200	83
		-9	-110					
MAEU02-24S03HI	24 ±10%	3.3	500	90	12	% (max.)	μF	%
MAEU02-24S05HI		5	400	108				
MAEU02-24S09HI		9	222	103				
MAEU02-24S12HI		12	168	102				
MAEU02-24S15HI		15	132	101				
MAEU02-24D05HI		±5	±200	108				
MAEU02-24D09HI		±9	±112	104				
MAEU02-24D12HI		±12	±84	104				
MAEU02-24D15HI		±15	±66	103				
MAEU02-24A1509HI		15	66	102	12	10	200	81
		-9	-110					

# For each output

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	15V Input Models	-0.7	---	20	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
	15V Input Models	13.5	15	16.5	
	24V Input Models	21.6	24	26.4	
Short Circuit Input Power	All Models	---	---	1000	mW
Input Filter		Internal Capacitor			

**Output Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	$\pm 5.0$	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	$\pm 0.1$	$\pm 1.0$	%
Line Regulation	For Vin Change of 1%	---	$\pm 1.2$	---	%
Load Regulation	Io=20% to 100%	See Model Selection Guide (Operation at lower load will not damage the converter, but it may not meet all specifications)			
Ripple & Noise	0-20MHz Bandwidth	---	---	100	mV P-P
Temperature Coefficient		---	$\pm 0.01$	$\pm 0.02$	%/°C
Short Circuit Protection	Continuous, Automatic Recovery				

**Isolation, Safety Standards**

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Rated for 60 seconds	5200	---	---	VDC
	Tested for 1 second	5700	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	7	---	pF
Safety Approvals	UL/cUL 60950-1 recognition (CSA certificate), IEC/EN 60950-1 (CB-report) UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)				


**General Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	100	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,109,000	---	---	Hours

**Environmental Specifications**

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	°C
Case Temperature	---	+95	°C
Storage Temperature Range	-55	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

### Power Derating Curve


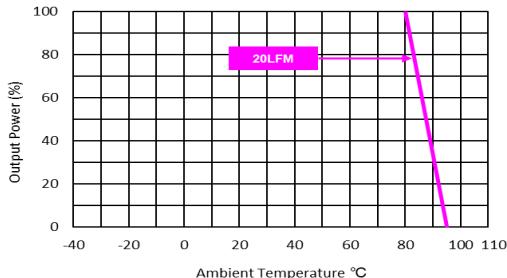


### Notes

- 1 Specifications typical at  $T_a=+25^{\circ}\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 Specifications are subject to change without notice.
- 6 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

### Package Specifications

#### Mechanical Dimensions

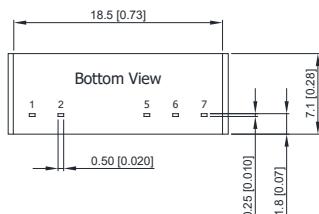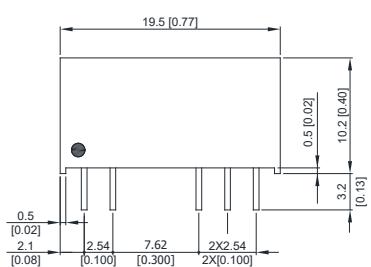

#### Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No Pin	Common
7	+Vout	+Vout

► All dimensions in mm (inches)

► Tolerance:  $X.X\pm 0.5$  ( $X.XX\pm 0.02$ )

$X.XX\pm 0.25$  ( $X.XXX\pm 0.01$ )

► Pins  $\pm 0.05$  ( $\pm 0.002$ )


### Physical Characteristics

Case Size	: 19.5x7.1x10.2mm (0.77x0.28x0.40 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Alloy 42
Weight	: 2.4g

## Test Setup

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$   $0.33\mu F$  ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

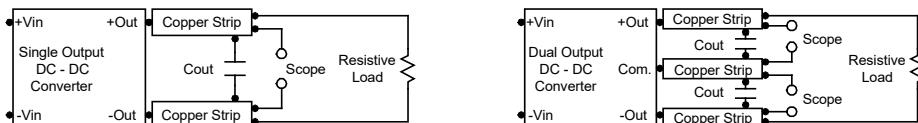

## Technical Notes


### Maximum Capacitive Load

The MAEU02-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

### Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a  $2.2\mu F$  for the 5V input devices, a  $1.0\mu F$  for the 12V,15V input devices and a  $0.47\mu F$  for the 24V devices.

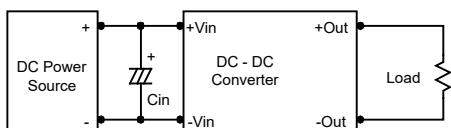

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use  $1.0\mu F$  capacitors at the output.

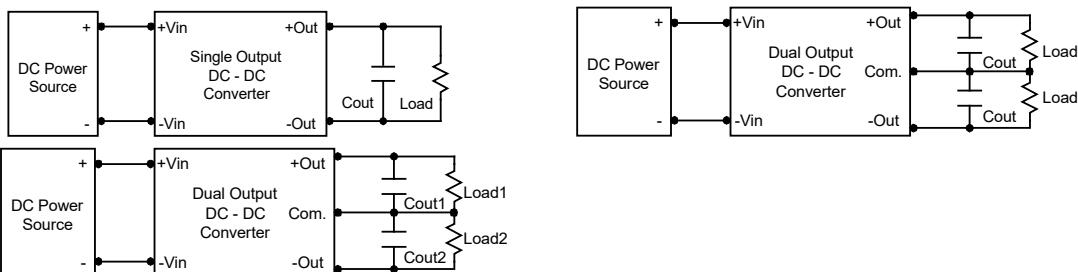

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below  $95^{\circ}C$ . The derating curves are determined from measurements obtained in a test setup.

